



## SMD LED ŞERİT 49 - LS49XX

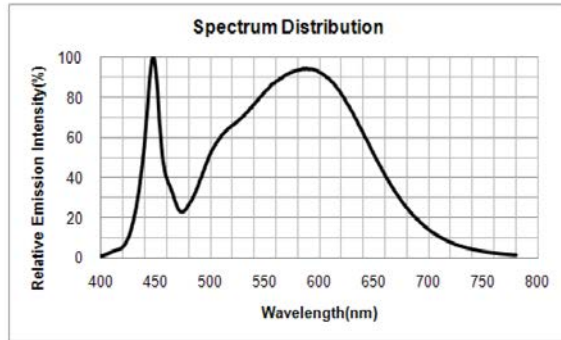

### TEKNİK ÖZELLİKLER

Ürün Kodu	LS49CW	LS49NW	LS49WW
Işık Kaynağı	49 ad LED / mt	49 ad LED / mt	49 ad LED / mt
Işık Rengi (K)	6000	4000	3000
Işık Akısı (Lm)	2989	2989	2989
Dış Yapı	Aluminyum Profil	Aluminyum Profil	Aluminyum Profil
Boyutlar (mm)	19 x 12 x 1000 (IP20) 30 x 19 x 1000 (IP44) ø 26 x 1000 (IP44) ø 30 x 1000 (IP65)	19 x 12 x 1000 (IP20) 30 x 19 x 1000 (IP44) ø 26 x 1000 (IP44) ø 30 x 1000 (IP65)	19 x 12 x 1000 (IP20) 30 x 19 x 1000 (IP44) ø 26 x 1000 (IP44) ø 30 x 1000 (IP65)
Ağırlık (kg)	0,3 (IP20); 0,5 (IP44) 0,5 (IP44); 0,4 (IP44)	0,3 (IP20); 0,5 (IP44) 0,5 (IP44); 0,4 (IP44)	0,3 (IP20); 0,5 (IP44) 0,5 (IP44); 0,4 (IP44)
Giriş Voltajı	24 VDC	24 VDC	24 VDC
Güç Tüketimi (W)	16,8	16,8	16,8
Ürün Ömrü (saat)	50000	50000	50000
Çalışma Sıcaklığı (°C)	-30°C ~ +60°C	-30°C ~ +60°C	-30°C ~ +60°C
Saklama Sıcaklığı (°C)	-30°C ~ +60°C	-30°C ~ +60°C	-30°C ~ +60°C
IP Sınıflandırması	IP20 ,IP44, IP65	IP20 ,IP44, IP65	IP20 ,IP44, IP65
Kontrol Sistemleri	1-10V , DMX	1-10V , DMX	1-10V , DMX

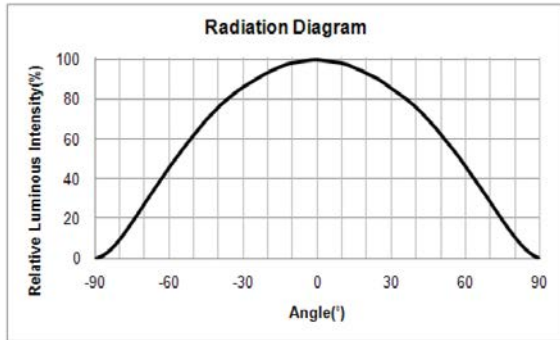

## LED ŐERİT UYGULAMALARI



## LED ŐERİT UYGULAMALARI

